

Migrating from Navigator to Atlas using CDH 6 with Cloudera Manager 7

Date published: 2020-07-28

Date modified: 2024-12-10



Legal Notice

© Cloudera Inc. 2025. All rights reserved.

The documentation is and contains Cloudera proprietary information protected by copyright and other intellectual property rights. No license under copyright or any other intellectual property right is granted herein.

Unless otherwise noted, scripts and sample code are licensed under the Apache License, Version 2.0.

Copyright information for Cloudera software may be found within the documentation accompanying each component in a particular release.

Cloudera software includes software from various open source or other third party projects, and may be released under the Apache Software License 2.0 (“ASLv2”), the Affero General Public License version 3 (AGPLv3), or other license terms. Other software included may be released under the terms of alternative open source licenses. Please review the license and notice files accompanying the software for additional licensing information.

Please visit the Cloudera software product page for more information on Cloudera software. For more information on Cloudera support services, please visit either the Support or Sales page. Feel free to contact us directly to discuss your specific needs.

Cloudera reserves the right to change any products at any time, and without notice. Cloudera assumes no responsibility nor liability arising from the use of products, except as expressly agreed to in writing by Cloudera.

Cloudera, Cloudera Altus, HUE, Impala, Cloudera Impala, and other Cloudera marks are registered or unregistered trademarks in the United States and other countries. All other trademarks are the property of their respective owners.

Disclaimer: EXCEPT AS EXPRESSLY PROVIDED IN A WRITTEN AGREEMENT WITH CLOUDERA, CLOUDERA DOES NOT MAKE NOR GIVE ANY REPRESENTATION, WARRANTY, NOR COVENANT OF ANY KIND, WHETHER EXPRESS OR IMPLIED, IN CONNECTION WITH CLOUDERA TECHNOLOGY OR RELATED SUPPORT PROVIDED IN CONNECTION THEREWITH. CLOUDERA DOES NOT WARRANT THAT CLOUDERA PRODUCTS NOR SOFTWARE WILL OPERATE UNINTERRUPTED NOR THAT IT WILL BE FREE FROM DEFECTS NOR ERRORS, THAT IT WILL PROTECT YOUR DATA FROM LOSS, CORRUPTION NOR UNAVAILABILITY, NOR THAT IT WILL MEET ALL OF CUSTOMER’S BUSINESS REQUIREMENTS. WITHOUT LIMITING THE FOREGOING, AND TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, CLOUDERA EXPRESSLY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, QUALITY, NON-INFRINGEMENT, TITLE, AND FITNESS FOR A PARTICULAR PURPOSE AND ANY REPRESENTATION, WARRANTY, OR COVENANT BASED ON COURSE OF DEALING OR USAGE IN TRADE.

Contents

About migrating from Cloudera Navigator to Atlas using Cloudera

Manager 7.....	4
Migrating Cloudera Navigator to Atlas while upgrading Cloudera Manager 7 with CDH 6.....	5
Estimating the time and resources needed for transition.....	5
Run the extraction for CDH 6 with Cloudera Manager 7.....	5
Removing Navigator role instances.....	7
Post upgrade operations for your CDH 6 clusters.....	8

About migrating from Cloudera Navigator to Atlas using Cloudera Manager 7

Navigator role instances under the Cloudera Management Service are no longer available while using Cloudera Runtime 7.1.9 release. You must perform the migration process before you upgrade to the [Cloudera Manager 7.11.3 Latest cumulative hotfix](#) version.

**Note:**

This change does not impact Navigator Encrypt and Navigator KTS functionality.

Customers planning to upgrade to Cloudera 7.3.1 from CDH clusters have to follow the following steps:

1. From CDH, upgrade to Cloudera Runtime 7.1.9. For more information on migrating data from Navigator to Atlas, see [Transitioning Navigator content to Atlas](#). After reaching the Cloudera Runtime 7.1.9 version, only Atlas to Atlas data migration is needed.
2. From Cloudera Runtime 7.1.9 upgrade to Cloudera Runtime 7.1.9 SP1. Upgrade to Cloudera Manager 7.11.3 with the [latest cumulative hotfix](#).
3. From Cloudera Runtime 7.1.9 SP1, you can upgrade to Cloudera Runtime 7.3.1. For more information on Cloudera Runtime to Cloudera Runtime upgrades, check the [Supported in-place upgrade paths](#).



Attention: Migrating from Navigator to Atlas is NOT required if:

- Cloudera Navigator is not installed on the Cloudera Enterprise 6 cluster that you are planning to upgrade to Cloudera Runtime 7.1.9 version.
- Cloudera Navigator is installed on your CDH 6 cluster and you do not require the pre-upgrade lineage information from Navigator.



Caution: Currently, you cannot perform the Nav2Atlas transition and the pre-upgrade lineage data will not be available after the CDH 6 to Cloudera Runtime 7.1.9 CHF upgrade process is completed. You can only export the Cloudera Navigator lineage using the `cnav.sh` tool and later proceed with the remaining steps of the upgrade process.

The result of this change is that, during the Nav2Atlas migration's first step, the Navigator lineage export process must be carried out before upgrading to the latest [Cloudera Manager 7.11.3 Latest cumulative hotfix](#).

Previous versions of Cloudera Manager 7 contained the `cnav.sh` script and included dependencies which are responsible to perform the Nav2Atlas export step.

Note the following regarding the [Cloudera Manager 7.11.3 Latest cumulative hotfix](#) / Cloudera Runtime 7.1.9 release:

- CDH 5 version is **NOT** supported in Cloudera Runtime 7.1.9 release.
- CDH 6 version is supported in Cloudera Runtime 7.1.9 release without Cloudera Navigator.
- **(Optional)** If Navigator service is available on your CDH cluster, before the CDH 6 cluster upgrade process, you must plan to export the lineage information to a zip file using the `cnav` tool and later remove Navigator. When you upgrade to [Cloudera Manager 7.11.3 Latest cumulative hotfix](#) / Cloudera Runtime 7.1.9 version, Navigator service is not available.

Supported CDH upgrade paths

Regular upgrade for CDH is supported using a couple of scenarios.

- Cloudera Manager 7 + CDH 6 -> Cloudera Runtime 7.1.9 / [Cloudera Manager 7.11.3 Latest cumulative hotfix](#)
- Cloudera Manager 6 + CDH 6 -> Cloudera Runtime 7.1.9 / [Cloudera Manager 7.11.3 Latest cumulative hotfix](#)

In the earlier upgrade processes, Cloudera Manager from version 6 was upgraded to 7 and later the Navigator metadata export was executed using the `cnav` tool. With the release of the [Cloudera Manager 7.11.3 Latest cumulative hotfix](#), `cnav` export process takes precedence over the Cloudera Manager upgrade operation.

Migrating Cloudera Navigator to Atlas while upgrading Cloudera Manager 7 with CDH 6

Learn about migrating Navigator to Apache Atlas while upgrading your CDH 6 clusters with Cloudera Manager 7 to Cloudera Runtime 7.1.9 version. You must perform the migration process before you upgrade to [Cloudera Manager 7.11.3 Latest cumulative hotfix](#).

Remember: Migrating from Navigator to Atlas is **NOT** required if:

- Cloudera Navigator is not installed on the Cloudera Enterprise 6 cluster that you are planning to upgrade to Cloudera Runtime 7.1.9 version.
- Cloudera Navigator is installed on your CDH 6 cluster and you do not require the pre-upgrade lineage information from Navigator.

As a pre-upgrade step, you must first complete the transition of Navigator data using the customized scripts

Transitioning Navigator data using customized scripts

You can run the customized scripts generated by the Cloudera Manager wizard to configure the Apache Atlas installation and start the Navigator-to-Atlas data migration process when you step into the Cloudera upgrade wizard. You can also run the migration scripts independently from the Cloudera upgrade.

The transition has three phases: extraction, transformation, and import. If you have not already, you must estimate the time and resource requirements for the migration steps.

Related Information

[Estimating the time and resources needed for transition](#)

Estimating the time and resources needed for transition

While the cluster is starting up, you can plan for and start the transition process.

- Inspect Navigator installation to determine the number of Navigator entities that will be transitioned.
- Estimate the time and disk space required for each phase of the transition.

The following transition rates are approximate and depend on the resources available on the Atlas host and other unknown factors. Note that the number of entities actually imported may be considerably less than the number of entities extracted. The transition process discards HDFS entities that are not referenced by processes that are transitioned (Hive, Impala, Spark).

Transition Phase	Transition Rate	Disk Space	Output File Size	Trial Data Points
Extraction	4 minutes / 1 million entities	100 MB / 1 million entities, less as volumes increase	65 MB / 1 million entities	10 million entities takes about 30 minutes; 256 million takes about 18 hours.
Transformation	1.5 minutes / 1 million entities	100 to 150 MB / 1 million entities, higher end of range with larger volumes	150 MB / 1 million entities	10 million entities takes about 20 minutes; 256 million takes about 6 hours.
Import	35 minutes / 1 million migrated entities	N/A	N/A	10 million entities takes about 4 hours; 256 million takes about 6 days.

Related Information

[Migrating Cloudera Navigator to Atlas while upgrading Cloudera Manager 7 with CDH 6](#)

Run the extraction for CDH 6 with Cloudera Manager 7

Extraction must be executed for all Navigator Metadata Server clusters prior to the Cloudera Manager upgrade.

Procedure**1.** Determine the required information for the extraction:

- Planned host for the Apache Atlas service
- JAVA_HOME location
- Navigator Metadata Server cluster names
- Navigator Metadata Server admin users
- Keystore and truststore paths and passwords

```
$ ssh <planned Atlas host>
$ export JAVA_HOME=...
$ /opt/cloudera/cm-agent/service/navigator/cnav.sh -n http://<NAVIGATOR_
METADATA_HOST>:7187 -u<NAVIGATOR_USERNAME> -p<NAVIGATOR_PASSWORD> -c '<C
LUSTER_NAME>' -o '/tmp/nav2atlas/<cluster_name>_navigator_data.zip'
```

2. Open a terminal window or command prompt from where you can access the cluster.**3.** Using the provided command, SSH into the Atlas host.**4.** Run the export command pointing to the location of the JDK, to make sure the JAVA_HOME variable is set.**5.** Customize the extraction command to include the Navigator admin user and password.**6.** Run the extraction command. When the extraction is complete, you can view a status message in the command output.

If Navigator is configured with TLS/SSL, the cnav script needs the following credential information:

- Truststore path
- Truststore password
- Keystore path
- Keystore password

To make these parameters available, run the following commands before running the cnav script:

```
export KEYSTORE_PATH=<keystore-path>;
export KEYSTORE_PASSWORD=<keystore-password>;
export TRUSTSTORE_PATH=<truststore-path>;
export TRUSTSTORE_PASSWORD=<truststore-password>
```

For example, the command sequence might look similar to the following (line breaks are introduced for readability):

```
export KEYSTORE_PATH=/opt/cloudera/CMCA/trust-store/acme_truststore.jks;
```

```
export
```

```
KEYSTORE_PASSWORD=Q01FAeH53dn1HLY74D68Kk1yMAQVGtOI_cLznArccid48DDzS0VXY-DWnz
pz0Ug10BvikGMoovYaZT2EEEdBGgLPiDCRKHyzFExE3OITRGazjKPtZxAaXOUzgKMMmQQgJKw-5J
W9I6WgLGbHcPkJfBa7vP3z6PFtm6XfYB-o3R6qmcDzZLwslDIQ18mowuFV1ouQIzA;
```

```
export
                                TRUSTSTORE_PATH=/var/lib/cloudera-scm-agent/a
gent-cert/cm-auto-host_keystore.jks;
```

```
export TRUSTSTORE_PASSWORD=123420978alngdfdfjliaiu;
```

```
/opt/cloudera/cm-agent/service/navigator/cnav.sh -n
                                https://acme-finance-1.acme-finance:7187 -u admin
-p adminpass -c "Cluster 2" -o
```

```
/tmp/nav2atlas/nav2altas_nav_export.zip
```



Note: The -c flag parameter in the nav2atlas script represents the Navigation Metadata Server (NMS) cluster name and NOT the Cloudera Manager cluster name. You must retrieve the value of -c from the Navigator UI to use it while running the nav2atlas script.



Attention: Nav2Atlas data migration can fail with **FileNotFoundException** error. The cnav tool changes the file name to lowercase if the zip file has uppercase. To overcome this behavior, you must:

- Change the file name to lower case.
- Configure atlas.nav2atlas.use.spawner=false.
- Rerun cnav.sh tool but with the -r ON option supplied and the -o option pointing to the existing cnav output zip file.



Important: In a CDH multi-cluster environment, multiple clusters are managed by one Navigator instance. In a Cloudera Base on Private Cloude deployment, each cluster has its own Atlas servers manage the respective cluster metadata. As of Cloudera Runtime 7.1.8 release, in a CDH multi-cluster environment, one of the CDH clusters was upgraded to Cloudera (where Atlas collected the service metadata) and the other CDH cluster originally communicated with Navigator.

Starting with Cloudera Runtime 7.1.9 release, Navigator service is not available. Before upgrading to Cloudera Manager, the Navigator data (including lineage information) must be extracted from all the CDH clusters before removing the Navigator role instances.

Removing Navigator role instances

You must stop and remove the Navigator role instances in your Cloudera Manager instance.

Procedure

1. In Cloudera Manager go to Cloudera Management Service Instances .
2. Select Navigator Audit Server and Navigator Metadata Server.
3. Under the Actions for selected, select Stop.

4. Select Delete.

The screenshot shows the Cloudera Manager 7 interface. The top navigation bar includes 'Cloudera Manager', 'Clusters', 'Hosts', 'Diagnostics', 'Audits', 'Charts', 'Backup', and 'Administration'. The 'Clusters' tab is active, and the 'Instances' sub-tab is selected. A search bar is present. On the left, a 'Filters' sidebar shows 'STATUS' as 'Good Health' (7 instances). A dropdown menu 'Actions for Selected (2)' is open, showing options: Start, Stop, Restart, Regenerate missing Keytab, Enter Maintenance Mode, Exit Maintenance Mode, and Delete. The 'Delete' option is highlighted. The main table lists instances with columns for State and Host. The visible instances are all in 'Started' state with hostnames like 'cdh-63x-sx-3.cdh-63x-sx.root.hwx.site'.

What to do next

Once the Navigator role instances are successfully removed from your Cloudera Manager instance, you must plan to perform the regular upgrade operations.

Post upgrade operations for your CDH 6 clusters

Once the CDH 6 with Cloudera Manager 7 upgrade to Cloudera Runtime 7.1.9 version process is completed, you must perform some of the post-upgrade operations.

Run the transformation for CDH 6 with Cloudera Manager 7

You can run the transformation as soon as the upgrade process is completed. To customize and run the transformation command. You can customize and run the transformation command.

Procedure

1. Go back to the editor where you saved the transformation commands, from copy the transformation command text from the step "Click Add Atlas Service."

```
$ ssh finance-3.finance.acme-core.site
$ export JAVA_HOME=...
$ /opt/cloudera/parcels/CDH-7.1.9-1.cdh7.1.9.p0.xxxxxxxx/lib/atlas/tools/
nav2atlas.sh -f tmp/nav2atlas/cluster_1_navigator_data.zip' -o '/tmp/nav
2atlas/cluster_1_atlas_data.zip' clusterName 'Cluster 1'
```

2. If needed, open a terminal window or command prompt where you have access to the cluster.
3. If needed, SSH into the Atlas host.
4. If needed, make sure the JAVA_HOME variable is set; if it isn't, run the export command pointing to the location of the JDK.

5. Run the transformation command.

When the transformation is complete, you'll see a status message in the command output.

What to do next

Run the import operation.

Related Information

[Run the import for CDH 6 with Cloudera Manager 7](#)


Run the import for CDH 6 with Cloudera Manager 7

When Apache Atlas starts up, it checks the output file location for a completed file from the transformation phase. When Atlas finds the completed file, it begins importing entities automatically. To view the progress of the import, follow these steps.

Procedure

1. Open the Atlas UI.

You can open Atlas from the Atlas service page in Cloudera Manager.

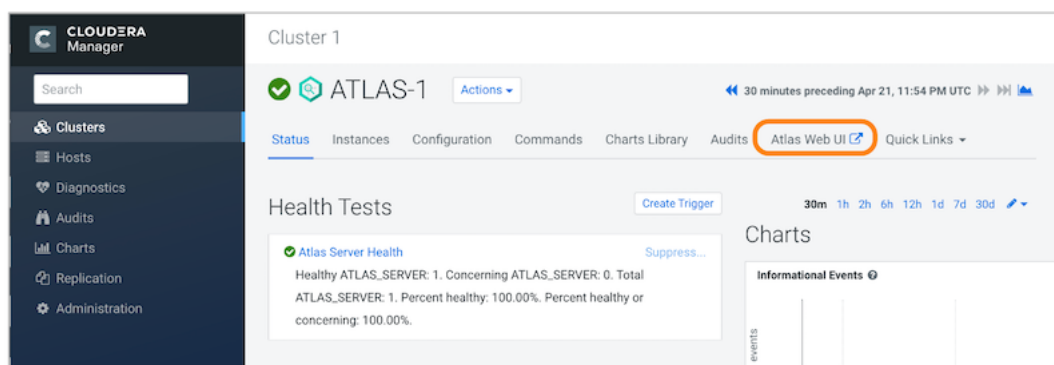

2. Review transition progress in the **Statistics** page.

The normal Atlas UI does not appear in migration mode; instead you shall view the **Statistics** page, which shows a real-time report of the number of entities, classifications, and other metadata that have been created in Atlas.

Related Information

[Run the transformation for CDH 6 with Cloudera Manager 7](#)

[Moving Atlas out of migration mode](#)

Moving Atlas out of migration mode

After installation, Apache Atlas runs in migration mode and you must move Atlas out from the migration mode.

Before you begin

- Atlas does not collect metadata from services running on the cluster. The metadata remains in Apache Kafka topics and is collected later

- Atlas starts importing metadata when it finds a final transformation file in the location you specified in output file location from the step Click Add Atlas Service.



Attention: This is the location where Atlas will look for the content to import. Make sure it matches the location you plan to use for the output of the transformation command.

1. Open Cloudera Manager for the Atlas service.
2. Go to the Configuration tab.
3. Filter the list of properties by typing "Safety" in the filter field.
4. Remove the migration-specific entries from the Atlas Server Advanced Configuration Snippet (Safety Valve) for conf/atlas-application.properties

You must remove the following properties:

- atlas.migration.data.filename
 - atlas.migration.mode.batch.size
 - atlas.migration.mode.workers
5. Reset the Atlas Max Heapsize property back to the default value.

Atlas Max Heapsize

atlas_max_heap_size

Atlas Server Default Group

16 GiB

Click to set the default value



6. Click Save Changes.
7. Restart Atlas. Choose Action.
8. Restart.

Related Information

[Run the import for CDH 6 with Cloudera Manager 7](#)